

Sunny-GII

Plus



TATSUNO
FILLS UP YOUR *Happiness*

Sunny-GII
Plus

RELIABLE

JAPAN QUALITY DISPENSER



THIS SALE \$ 989990
LITERS 9900
PRICE / LITER \$ 99999

■ **BLUE LED DISPLAY** Long-lasting. A fine display uses-visibility bright blue LED back light.

EMERGENCY



STOP

Preset Instruction

1. Press the emergency stop button to stop the pump when the nozzle is not working.
2. Press the emergency stop button to stop the pump when the nozzle is not working.
3. Press the emergency stop button to stop the pump when the nozzle is not working.



■ **WINDOW and DISPLAY**
Standard - equipped with user-friendly keypad.

■ **NEW CURVED DESIGN**

SUPPORTED BY FULL RANGE OF OPTIONS

- Non-resettable electromagnetic totalizer
- Emergency stop switch ■ Sight glass
- Double swivel ■ Safety coupling
- Emergency shut-off valve (Shear valve) ■ Washable filter
- High-speed : 60 L/min Maximum speed : 80 L/min ■ Top gallery panel

GLOBAL STANDARD COMPONENTS

- Meet OIML standards and achieving optimum balance of excellent performance economically
- Compact body fits into narrow spaces



■ Gear Pump Type



■ 4-Piston flow meter



LIST OF FUNCTION AND MODELS




■ Dimension



■ Type 1111



■ Type 1222

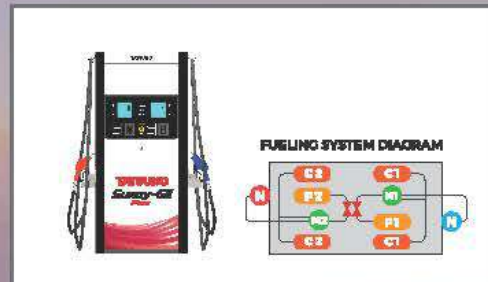

■ Type 2222

- 1 pump **P**
- 2 nozzle **N**
- 2 counter **C**
- 2 simultaneous **M**

- P** 1 pump
- N** 1 nozzle
- C** 1 counter
- M** 1 simultaneous

- P** 2 pump
- N** 2 nozzle
- C** 2 counter
- M** 2 simultaneous

Specifications

Delivery Speed	Standard speed (Gasoline/Diesel) : 40 - 45 L/min
	High speed (Gasoline/Diesel) : 50 - 60 L/min
	Max speed (Diesel) : 70 - 80 L/min
	Delivery speed is fluctuate by installed components (Suction type)
	Delivery speed is fluctuate by STD and installed components (Submersible type)
Suction Head (Suction Type)	4 m (Gasoline column) / max 5 m (Diesel column)
Measuring Accuracy	± 0.25%
Display Type	Micro-computer type electronic counter at non-hazardous area
Price and Volume Indication	Price : 7 digits 0.01 - 99,999.99
	Volume : 7 digits 0.01 - 99,999.99
	Unit price : 5 digits 0.01 - 999.99
	Decimal places are possible to change according to each local specification
Size of Display Character	Price readout : 30H x 120W mm
	Volume readout : 30H x 120W mm
	Unit price readout : 24H x 98W mm
Color of Display Character	Black characters with BLUE backlight. (LCD)
Reset Device	Automatic reset in nozzle holder
Totalizer	Electronic : 10 digits 99 999 999.99 liters (Displayed on counter)
Daily Totalizer	Electronic : 10 digits 99 999 999.99 liters (Displayed on counter)
Keypad	Volume and amount preset can be set up from dispenser.
	Numeric key only
Over Voltage Protector	Provided
Self-diagnosis	Provided
Initial-setting Method	By using keypad
Pulsar	0.01 L/pulse
Pump (Suction Type)	Internal silent gear pump with air separator, by-pass valves, suction strainer and check valves
Meter	4-piston type positive displacement meter with electronic calibration
Flow Control Valve	2-stage valve
Motor (Suction Type)	Explosion-proof, continuous duty motor with over-load protection 1-phase 3/4 HP (220 to 240 V) 1-phase 1 HP (220 to 240 V) 3-phase 1 HP (380 V)
Filter (Submersible Type)	Paper filter
Hose	3/4" x 15 ft
Nozzle	3/4" automatic stop nozzle
Swivel	Single swivel


Note: The delivery speed of the pump may change due to the following condition if it is used beyond Tatsuno's installation and operational instructions :

1. Size and length of hose
2. Size and type of nozzle / swivel
3. Oil products, suction condition, and local piping condition

Specifications are subject to change with or without prior notice.



Line: salesbu

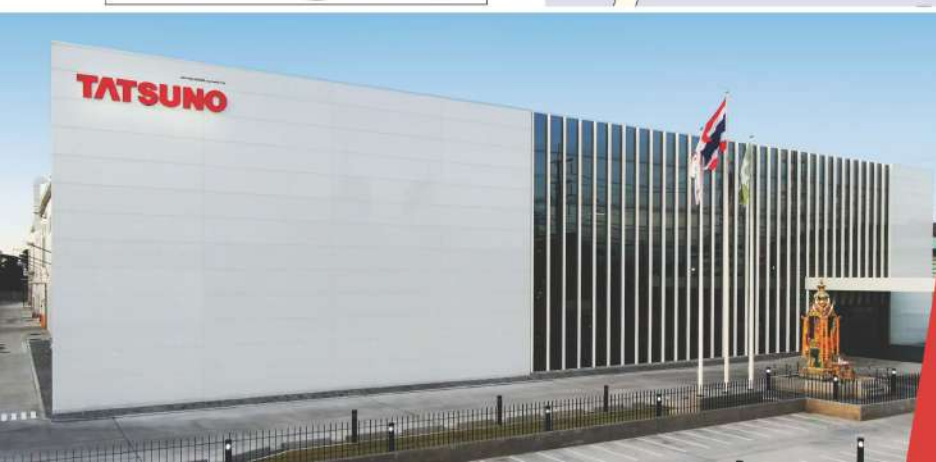

Website: www.tatsuno.co.th
 Line: salesbu
 Facebook: Tatsuno Thailand Co., Ltd.
 Tel: +66 2 532-0987, +66 2 532-7101-4, 061-386-4488, 061-393-8181
 Fax: +66 2 532-0986

TATSUNO (THAILAND) CO., LTD.
 1/8 Mu 3 Ladsawai Lamlukka
 Pathumthani, Thailand 12150